

New Water Tower

Estimated Project Cost: \$4,813,309

Project Details

Project Summary


In November 2011, a Certificate of Obligation was approved for the construction of a new water tower.

In August, 2015, and based on the updated Water Master Plan, the Council approved the design and construction of a new 1.25M gallon elevated water tower, located at the existing water tower site, and three infrastructure projects to support the efficiency and effectiveness of the water system once the new tower is installed. The three infrastructure projects include the installation of a 16" water line along Town East from Homestead 5B to 5A and from Homestead 5B to Tower Place and a 12" line through New Hope & Hidden Lakes.

The total project for the design, water tower construction and water lines is \$4,813,309 and should be completed in October 2017.

Project Costs

Design	\$409,800
Bond Issuance Cost	included
Construction (estimate) water tower	\$3,203,000
Construction (estimate) water lines	\$920,407
Contingency (estimate)	\$280,102
Land	Existing site
Total Cost	Approx. \$4,813,309

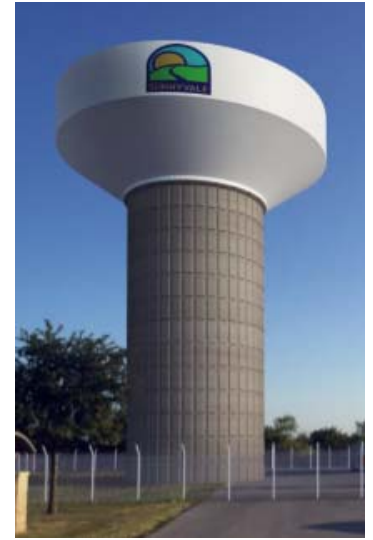

Project Schedule

Design Completion:	March, 2016
Advertise:	April, 2016
Bid Opening:	May, 2016
Council Award:	May, 2016
Construction Begin:	September, 2016
Construction End:	October, 2017 (estimate)

Latest News

May 2017

Construction site preparations were started in September 2016.

Workers completed the concrete column and interior infrastructure in March 2017 and started welding the bowl together in April. Construction is anticipated to be completed in September and the tower being operational in October. The Town is also in work installing the three new water lines along Hidden Lakes and Town East to support the new tower and should be completed by August.